
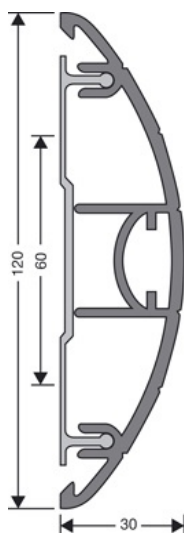


## DATA SHEET

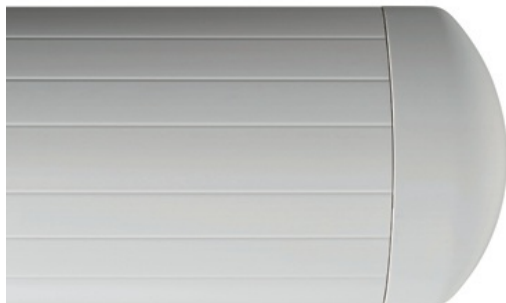

### DESCRIPTION

For protecting walls in corridors  
 Drilled - countersunk: to be screwed  
 Invisible fixing with clips

### USE

For overlapping a wall covering or a painted wall.

### REFERENCE

Ref : 470001

### MATERIAL

Highly shock-resistant PVC profile - Fire rating: Bs2 d0  
 Smooth surface  
 REACH compliant

### FITTING MODE

Position the profile base. Locate the holes and drill the wall. Place the ROMUS plugs 94154, fasten the base with ROMUS screws 94136. Clip the cover on the base to ensure a good connection. M1 fire rating.

The information contained in this document is provided for information purposes. Romus cannot be held liable for this information. The user or specifier will check the compatibility of the product technical data with the actual situation. Romus reserves the right to modify all or part of this document without prior notice.

Architect :

Project :

Email :


Tel :

Distributor :

Tel :

Email :

## DATA SHEET



### > **MAINTENANCE**

Use standard cleaners (neutral detergents)

The information contained in this document is provided for information purposes. Romus cannot be held liable for this information. The user or specifier will check the compatibility of the product technical data with the actual situation. Romus reserves the right to modify all or part of this document without prior notice.

Architect :

Project :

Email :

Tel :

Distributor :

Tel :

Email :